

ICP® Strain Sensors

Monitor forces indirectly via strain measurements on machine tools, production machinery, mechanical presses, and plastics molds

- Measure Longitudinal Strain on Machinery Structures
- Control Press Forces and Other Processes
- Monitor Quality, Safety, and Reliability
- Robust Construction Endures Harsh, Industrial Environments
- Simple Installation is Non-Invasive to Process

The Series M240 Industrial ICP® Strain Sensors incorporate piezoelectric quartz sensing crystals that respond to a longitudinal change in distance. The resultant strain measurand is an indirect measurement of stress forces acting along the structure to which the sensor is mounted. As such, these devices can provide insight into the behavior of mechanical systems or processes that generate an associated machinery reaction.



Series M240
Industrial ICP® Strain Sensors
(Actual Size)



Monitoring such measurement signals can provide the necessary indication for process interrupt and pass — fail decisions or for determining wear and degradation of equipment and tooling. The sensors are used for controlling processes in plastics injection molding, stamping, and pressing, as well as monitoring processes and final product quality. These devices are easy to install and can be powered by any ICP® sensor signal conditioner.

As with all equipment from PCB, these sensors are complemented with toll-free applications assistance, 24-hour customer service, and are backed with a Total Customer Satisfaction guarantee.



Specifications

Model	Series M240
Performance	English
Sensitivity ($\pm 20\%$):	
Model M240A01	100 mV/ $\mu\epsilon$
Model M240A02	50 mV/ $\mu\epsilon$
Model M240A03	10 mV/ $\mu\epsilon$
Amplitude Range:	
Model M240A01	50 pk $\mu\epsilon$
Model M240A02	100 pk $\mu\epsilon$
Model M240A03	300 pk $\mu\epsilon$
Broadband Resolution (1 Hz to 10 kHz):	
Model M240A01	0.0001 $\mu\epsilon$
Model M240A02	0.0002 $\mu\epsilon$
Model M240A03	0.001 $\mu\epsilon$
Common Specifications	
Low Frequency Response (-5%)	0.004 Hz
Amplitude Linearity	$\pm 2\%$
Electrical	
Excitation Voltage	20 to 30 VDC
Constant Current Excitation	2 to 20 mA
Output Bias Voltage	8 to 14 VDC
Discharge Time Constant	≥ 150 sec
Environmental	
Operating Temperature	-65 to +250 °F (-54 to +121 °C)
Mechanical	
Sensing Element	Quartz
Housing	Stainless Steel
Electrical Connector	10-32 coaxial
Size (w × l × h)	0.67 × 1.81 × 0.6 in (17 × 46 × 15.2 mm)
Weight	1.6 oz (45 gm)
Mounting Thread	M6 × 1.00-6g
Supplied Accessories	
Mounting Screw (metric)	M6 × 1.00-6g

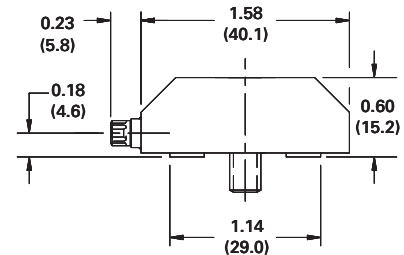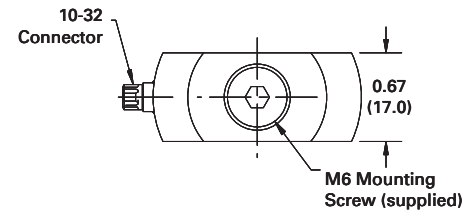

**Series M240
Industrial ICP® Strain Sensors**
Dimensions shown are in inches (millimeters)



3425 Walden Avenue, Depew, NY 14043-2495 USA

Force / Torque Division toll free 888-684-0004

24-hour SensorLineSM 716-684-0001

Fax 716-684-8877 E-mail force@pcb.com

Web site www.pcb.com

ISO 9001:2000 CERTIFIED

A2LA ACCREDITED to ISO 17025

© 2004 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, and TORKDISC are registered trademarks of PCB Group, Inc.

SensorLine is a service mark of PCB Group, Inc. All other trademarks are properties of their respective owners.

FTQ-M240-0604

Printed in U.S.A.

The Force/Torque Division of PCB® Piezotronics, Inc. specializes in the development, application, and support of piezoelectric and strain gage force sensors, load cells, strain sensors, and torque sensors for a wide range of research, test, measurement, monitoring, and control requirements. This product focus, coupled with the strengths and resources of PCB, permits the Force/Torque Division to offer exceptional customer service, 24-hour technical assistance, and a **Total Customer Satisfaction** guarantee.

Visit www.pcb.com to locate your nearest sales office